

RD35Q.2.S系列 - 桥式两侧可打开

Series of RD35Q.2.S - Bridge type open of both side



闭合状态：
Opening type:

- Q** 桥式
Bridge type
- F** 全封闭式
Enclosed
- BF** 半封闭式
Semi-enclosed

注：无字母为普通型
Note: blank means general type

打开方式：
Opening way:



- B** 不可打开
Non-opening
- S** 双侧打开
Open of both side
- W** 外侧打开
Exterior opening
- N** 内侧打开
Interior opening
- F** 无需打开
Without opening

款式：
Style:

- Q.B** 桥式不可打开
Bridge type non-opening
- Q.N** 桥式内侧开
Bridge type interior opening
- Q.W** 桥式外侧开
Bridge type exterior opening
- Q.S** 桥式双侧可打开
Bridge type both side opening
- BF.B** 半封闭不可开
Semi-enclosed non-opening
- BF.N** 半封闭内侧开
Semi-enclosed interior opening
- BF.W** 半封闭外侧开
Semi-enclosed exterior opening
- BF.S** 半封闭双侧开
Semi-enclosed both side opening
- F.N** 封闭内侧开
Enclosed interior opening
- F.W** 封闭外侧开
Enclosed exterior opening
- F.S** 封闭双侧开
Enclosed both side opening

接头类型：
Bracket type:



- X** 斜型接头
Oblique bracket
- F** 方型接头
Square bracket



- ◎ The cable chain tested service life is up to 20 million times.
- ◎ The ledge of cable chain is able to open to inspect or replace cable.
- ◎ The cable chain is suitable for a diameter of 32mm or less of cable.

- ◎ 测试使用寿命达 2 千万次
- ◎ 可将拖链内外侧挡片打开，方便检查或更换线缆
- ◎ 适用于直径 32 毫米以下线缆

主要技术参数 Basic technical data

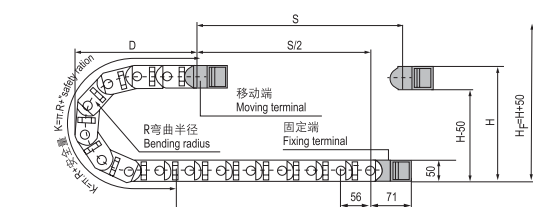


节距=56mm, 每米节数=18, 链长=S/2+K, S=行程距离, K=π.R+"安全量"
Pitch=56mm, link per meter=18, length of chain=S/2+K, S=stroke, K=π.R+"safety ration"

	R	75	150
H		200	350
D		156	231
K		392	616

安装实际高度: H_i=H+50mm(负载 1.0kg/m)
Actual mounting height: H_i=H+50mm(load 1.0kg/m)

RD35Q.2.S系列 - 桥式两侧可打开 Series of RD35Q.2.S-Bridge type open of both side

示意图 Drawing

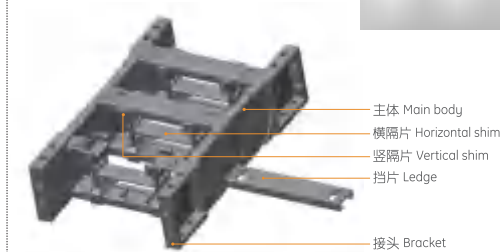


选配区 Accessories table



系列号 Series No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters									
							可配接头类型 Applicable bracket type	孔径 Bore diameter φ1	孔距 (mm)hole distance						代号 No.	
									A	B	C	D	E	F		
RD35Q.2.50S	35	50	50	67	Q.S	75,150	F-Q	5.2	15	63	71	17	12	75	RD35Q.2.50S-FJT	
RD35Q.2.100S	35	100	50	117	Q.S		F-Q	5.2	15	113	71	17	12	125	RD35Q.2.100S-FJT	
RD35Q.2.125S	35	125	50	142	Q.S		F-Q	5.2	15	138	71	17	12	150	RD35Q.2.125S-FJT	

注：S 表示两侧可打开
Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

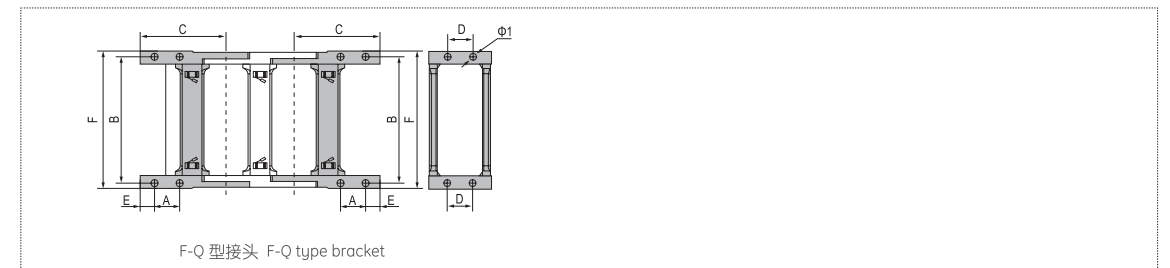

订货示例 Order Sample

示例 拖链内高 35mm、内宽 50mm、半径 75mm、长度 1 米 /18 节 (Sample: inner height 35mm, inner width 50mm, radius 75mm, length 1 meter /18 links)

拖链 Chain RD35Q.2.50S R75 1000mm /18 Links

接头 Bracket RD35Q.2.50S-XJT 副 (Set)

配件 Accessories 每节装 1 个竖隔片 /1 个横隔片 (1 vertical shim/1 horizontal shim can be mounted in every link)

注：可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.